
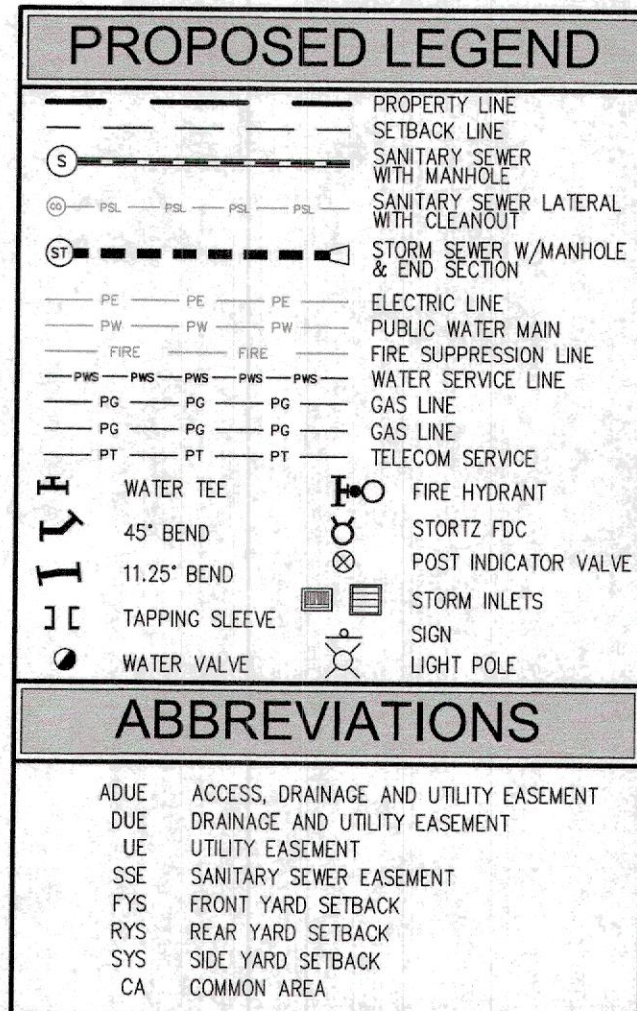


DIRECTORY PATH : R:\McDev\Land\Henderson\Wellness Center\Design\CAD\Plans
DATE/USER : 5/5/2019 1:38 PM / Dwyer

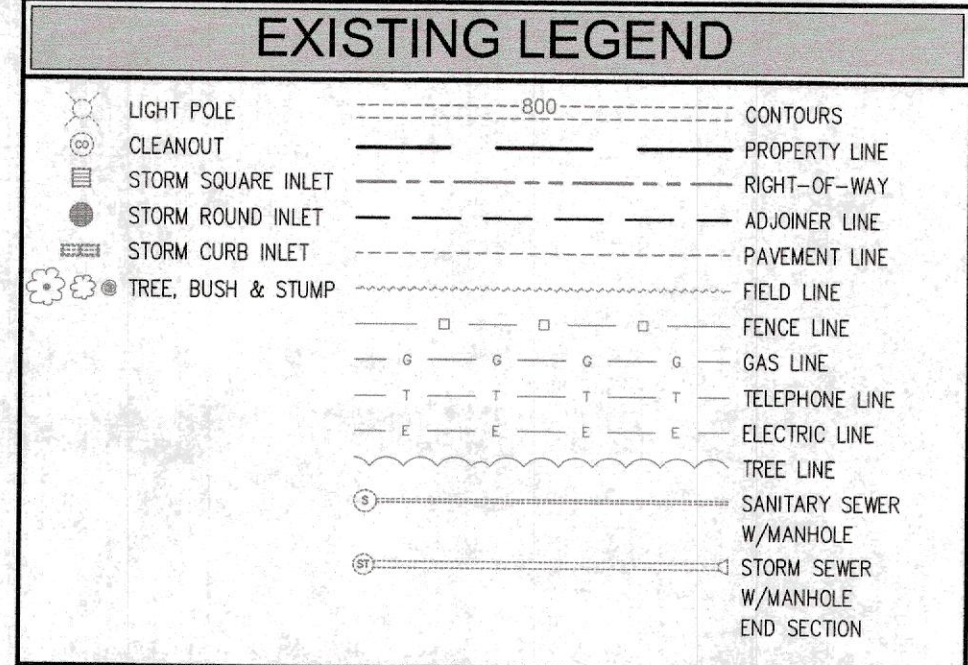

SANITARY LATERAL DATA TABLE

INSTALL SANITARY CLEANOUT AND 30-35 PVC SANITARY LATERAL AS INDICATED BELOW. MINIMUM LATERAL SLOPE SHALL BE 1/4% CONTRACTOR TO CONFORM CLEANOUT LOCATIONS, LATERAL DIAMETERS, AND INVERTS WITH BUILDING PLANS.

RUN	CLEANOUT TYPE	DIAMETER	LENGTH	SLOPE	U.S. INVERT
[1]	TYPE II	6"	60'	1.10%	862.62
[2]	TYPE II	6"	100'	1.82%	864.44
[3]	TYPE II	6"	100'	1.10%	865.54
[4]	TYPE II	6"	100'	1.10%	866.64
[5]	TYPE II	6"	31'	2.12%	869.29
[6]	TYPE II	6"	59'	1.10%	867.29
[7]	N/A	6"	25'	2.00%	861.54
[8]	N/A	6"	25'	2.00%	861.78
[9]	N/A	6"	25'	2.00%	863.02
[10]	TYPE I	6"	SEE NOTES	SEE NOTES	SEE NOTES

NOTES:
1) CONTRACTOR SHALL VERIFY ALL INVERT ELEVATIONS OF LATERALS EXISTING THE BUILDING WITH THE MEP AND BUILDING PLANS AND REPORT DISCREPANCIES TO THE ENGINEER.
2) CONTRACTOR SHALL TEMPORARILY CAP THE UPSTREAM END OF RUNS #7-9 AND MARK THE ENDS OF THE LATERALS WITH A GREEN FENCE POST.
3) CONTRACTOR SHALL REFER TO THE PLUMBING PLANS FOR THE LENGTH, SLOPE AND INVERT ELEVATION OF RUN #10.

STRUCTURE DATA TABLES
SEE SHEET 403

NOTE:
NO EARTHWORK
DISTURBING ACTIVITY
MAY COMMENCE UNTIL
A STORM WATER
MANAGEMENT PERMIT
IS OBTAINED.

EXISTING UTILITY SIZE AND MATERIAL INFORMATION SHOWN ON THESE PLANS ARE PER THE BEST GRAPHICAL AND VISIBLE INFORMATION AVAILABLE. CONFLICTS MAY EXIST AND IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY ALL SIZING AND MATERIAL INFORMATION PROVIDED. IF ACTUAL CONDITIONS DIFFER FROM THAT INFORMATION SHOWN ON THE PLANS, THE CONTRACTOR SHALL PRIOR TO THE INSTALLATION OF ANY PROPOSED INFRASTRUCTURE, NOTIFY THE DESIGN ENGINEER IMMEDIATELY.



CROSSROAD ENGINEERS, PC
TRANSPORTATION & DEVELOPMENT CONSULTANTS
1000 N. 10TH AVE. SUITE 200
MOSCOW, ID 83843
208.385.1100
CROSSROADENGINEERS.COM

PARKING LOT UTILITY PLAN

PENDLETON HEALTHPLEX

JOB No. _____
DATE: SEPTEMBER 10, 2018
DESIGNED: DMS
CHECKED: LUC
APPROVED: CJI
SHEET: 402

REVISIONS PER CLIENT & TOWN OF PENDLETON COORDINATION

NO.	DATE	REVISIONS
9	06.05.19	REVISED TO INCLUDE 100'-N-S-EAL FLEXIBLE BOOT CONNECTION TO SANITARY W/ STR. # SS-1 & ASPHALT PAV. SECTION PER TOWN REQUIREMENTS
7	02.12.19	RAISED ENTIRE PROJECT (TOPOGRAPHIC SURVEY AND PROPOSED IMPROVEMENTS) 0.38' FOR VERTICAL DATUM CORRECTION
6	12.10.18	ADDED SANITARY LATERAL STUDIES FOR FUTURE CONNECTIONS AT LOT #2 AND BLOCK A
5	11.26.18	REVISIONS PER PLANNING COMMENTS AND BANNING ENG. ROAD ALIGNMENT & PROFILE AND WATER LAYOUT PER CAD FILE DATED 11.13.18
4	11.20.18	REVISIONS PER TOWN OF PENDLETON AND MADISON CO. DRAINAGE BOARD (BANNING ENG.) COMMENTS
3	10.09.18	REVISIONS TO SANITARY SEWER PER C.C.W.D. COMMENTS
2	10.01.18	REVISIONS PER INTERNAL AND OWNER REVIEWS
1	09.20.18	DATE